

Shaft for linear motion
Induktionsgehärtete



BRT


Giu 2023

COLONNE GUIDA
Guiding pillars
Führungssäulen

BARRE PER SCORRIMENTO LINEARE

Materiale: acciaio 1.1213
Material: steel 1.1213
Werkstoff: stahl 1.1213

Durezza: Hrc 62÷64 esterno, Hrc 25÷35 interno forabile
Hardness: Hrc 62÷64 outside, Hrc 25÷35 pierceable inside
Härte: Hrc 62÷64 äußerlich, Hrc 25÷35 perforierbarer Innenraum

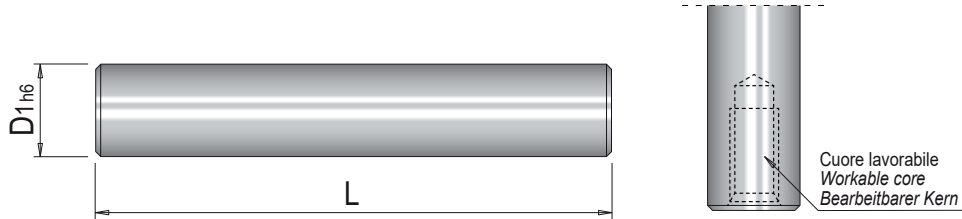

L 1000	D1																				
		6	8	10	12	14	15	16	18	20	22	24	25	28	30	32	35	40	50	60	80
	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

Esempio d'ordine: BRT = D1 x L
Order example:
Bestellbeispiel:

Fornibili tagliate su misura
On request different length / Andere Längen auf Anfrage

PROFONDITÀ TEMPRA CON TOLLERANZA ±0,5	
Diametro / diameter	Profondità / depth
Da Ø 6 a Ø 16	0,6 / 1,3 mm
Da Ø 18 a Ø 30	0,9 / 1,8 mm
Da Ø 35 a Ø 50	1,5 / 1,8 mm
Da Ø 60 a Ø 80	2,2 / 3,9 mm